



TRACCESS



PRODUCT LINE



Contact: Geoff Davies
Phone: 0406 406 555
Email: geoff@traccess.com.au
Web: www.traccess.com.au

TRACCESS - HC0507E

15' TRACKED SCISSOR LIFT


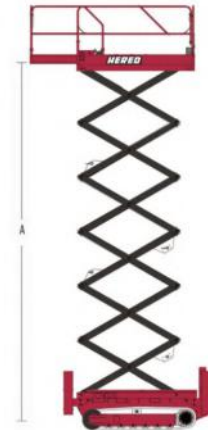


| Models | HC0507E |
|--------------------------|------------------|
| Max. Working Height | 6.5m |
| A-Max. Platform Height | 4.5m |
| B-Platform Length | 1.34m |
| C-Platform Width | 0.72m |
| Extension Size | 0.6m |
| D-Heights (Rails Up) | 2.07m |
| Height (rails Down) | 1.71m |
| E-Length (with Ladder) | 1.48m |
| F-Overall Width | 0.79m |
| G-Ground Clearance | 70mm |
| Platform Capacity | 130kg |
| Extension Capacity | 113kg |
| Max. Occupancy(in./out.) | 1 |
| Drive Speed (Stowed) | 4km/h |
| Turning Radius | Rotation in Situ |
| Up/Down Time | 25/20s |
| Gradeability | 25% |
| Max. Slope | 1.5°/3° |
| Max.Outrigger Levelling | / |
| Drive | Front Crawler |
| Crawler (mm) | 150x72x43 |
| Max. Wind Speed | 0m/s |
| Batteries (V/Ah) | 2x12V/100Ah |
| Charger | 100-240VAC/15A |
| Weight | 920kg |

| Models | HC0507E |
|--------------------------|------------------|
| Max. Working Height | 7.8m |
| A-Max. Platform Height | 5.8m |
| B-Platform Length | 1.67m |
| C-Platform Width | 0.74m |
| Extension Size | 0.9m |
| D-Heights (Rails Up) | 2.19m |
| Height (rails Down) | 1.77m |
| E-Length (with Ladder) | 2.34m |
| F-Overall Width | 1.24m |
| G-Ground Clearance | 120mm |
| Platform Capacity | 230kg |
| Extension Capacity | 113kg |
| Max. Occupancy(in./out.) | 2 |
| Drive Speed (Stowed) | 3.5km/h |
| Turning Radius | Rotation in Situ |
| Up/Down Time | 23/22s |
| Gradeability | 40% |
| Max. Slope | / |
| Max.Outrigger Levelling | 18°/10° |
| Drive | Rear Crawler |
| Crawler (mm) | 180x72x53 |
| Max. Wind Speed | 12.5m/s |
| Batteries (V/Ah) | 4x6V/260Ah |
| Charger | 100-240VAC/30A |
| Weight | 1900kg |


TRACCESS - HC0610E

19' TRACKED SCISSOR LIFT - STEEL TRACKS

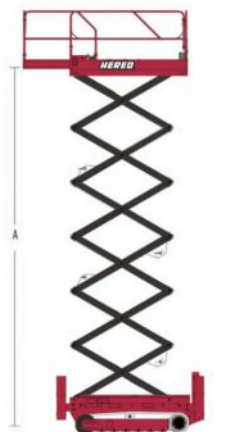

TRACCESS - HC0610E




19' TRACKED SCISSOR LIFT- RUBBER TRACKS

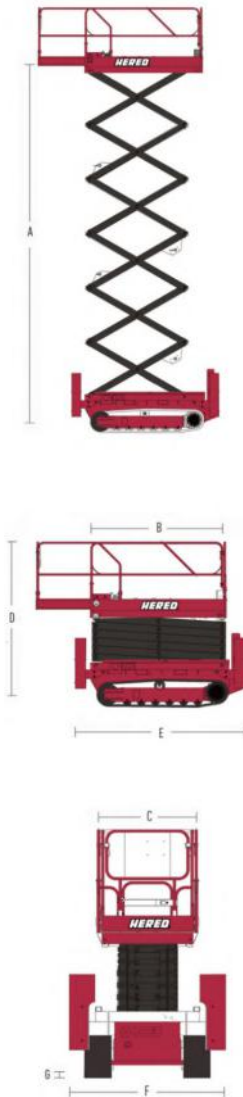

| Models | HC0507E |
|--------------------------|------------------|
| Max. Working Height | 7.8m |
| A-Max. Platform Height | 5.8m |
| B-Platform Length | 1.67m |
| C-Platform Width | 0.74m |
| Extension Size | 0.9m |
| D-Heights (Rails Up) | 2.19m |
| Height (rails Down) | 1.77m |
| E-Length (with Ladder) | 2.34m |
| F-Overall Width | 1.24m |
| G-Ground Clearance | 120mm |
| Platform Capacity | 230kg |
| Extension Capacity | 113kg |
| Max. Occupancy(in./out.) | 2 |
| Drive Speed (Stowed) | 3.5km/h |
| Turning Radius | Rotation in Situ |
| Up/Down Time | 23/22s |
| Gradeability | 40% |
| Max. Slope | / |
| Max.Outrigger Levelling | 18°/10° |
| Drive | Rear Crawler |
| Crawler (mm) | 180x72x53 |
| Max. Wind Speed | 12.5m/s |
| Batteries (V/Ah) | 4x6V/260Ah |
| Charger | 100-240VAC/30A |
| Weight | 1900kg |

| MODEL | XE60CT OR | XE80CT OR |
|--|-----------------------|-----------|
| Working height max H1 | 6.8 m | 8 m |
| Platform height max H2 | 4.8 m | 6 m |
| Max. Outreach | 0.9 m | |
| Lifting capacity | 230 kg | |
| Lift capacity on the extension | 115 kg | |
| Dimension of the platform B x C x A | 1.84 x 0.9 x 1.1 m | |
| Platform skirting board height L | 0.13 m | |
| Overall length and width E x F | 2.26 x 1.12 m | |
| Height stowed D | 2.12 m | 2.22 m |
| Height - guardrails folded M | 1.75 m | 1.85 m |
| Ground clearance H | 0.13 m | |
| Rising time / lowering time | 24 / 22 s | 32 / 30 s |
| Drive speed - stowed | 1.7 km/h | |
| Drive speed - raised | 0.7 km/h | |
| Gradeability | 40% | |
| Tilt sensor - front to back | 3° | |
| Tilt sensor - side to side | 2° | |
| Outrigger level ability - front to back | 4.5° | |
| Outrigger level ability - side to side | 10° | |
| Drive model | Electric | |
| Hydraulic tank capacity | 10 L | |
| Crawler size | Y200 x 72 -49 Section | |
| Max. platform occupancy | 2 pers | |
| Power source | 24 V / 225 Ah | |
| Weight | 1445 kg | 1525 kg |

- » Mantall crawler-type electric scissor lift has characteristics of zero emission, no noise, and has powerful climbing function.
- » The carrying capacity could be up to 230Kg, and lifting process is stable, safe and reliable.
- » Strong driving force and fast reaction speed.
- » With on-board diagnostic system, intelligent fault alarm system and other functions.

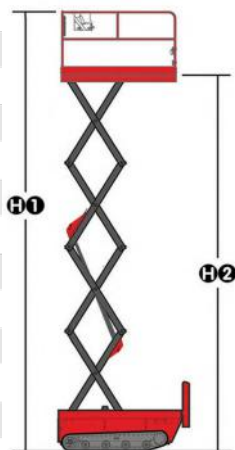

MANTALL - XE80CT-OR

19' TRACKED SCISSOR LIFT



TRACCESS


- HC1216E-R - HC1416E-R

40' / 45' TRACKED SCISSOR LIFT




| Models | HC1216E-R | HC1416E-R |
|--------------------------|------------------|------------------|
| Max. Working Height | 13.8m | 15.8m |
| A-Max. Platform Height | 11.8m | 13.8m |
| B-Platform Length | 2.26m | 2.64m |
| C-Platform Width | 1.12m | 1.12m |
| Extension Size | 0.9m | 0.9m |
| D-Heights (Rails Up) | 2.63m | 2.71m |
| Height (rails Down) | 2.03m | 2.01m |
| E-Length (with Ladder) | 2.83m | 3.02m |
| F-Overall Width | 1.6m | 1.6m |
| G-Ground Clearance | 150mm | 146mm |
| Platform Capacity | 320kg | 250kg |
| Extension Capacity | 113kg | 113kg |
| Max. Occupancy(in./out.) | 2 | 2 |
| Drive Speed (Stowed) | 4km/h | 4km/h |
| Turning Radius | Rotation in Situ | Rotation in Situ |
| Up/Down Time | 65/60s | 76/53s |
| Gradeability | 40% | 40% |
| Max. Slope | / | / |
| Max.Outrigger Levelling | 12°/5° | 12°/5° |
| Drive | Rear Crawler | Rear Crawler |
| Crawler (mm) | 230x90x53 | 300x101x48 |
| Max. Wind Speed | 12.5m/s | 12.5m/s |
| Batteries (V/Ah) | 8x6V/200Ah | 8x6V/200Ah |
| Charger | 100-240VAC/35A | 100-240VAC/35A |
| Weight | 3660kg | 4150kg |

| Models | HS1218ERT |
|--------------------------|----------------------|
| Max. Working Height | 14m |
| A-Max. Platform Height | 12m |
| B-Platform Length | 2.92m |
| C-Platform Width | 1.65m |
| Extension Size | 0.65m(Double Side) |
| Heights (Rails Up) | 2.88m |
| Heights (Rails Down) | 2.10m |
| E-Length (with Ladder) | 3.75m |
| F-Overall Width | 1.75m |
| G-Wheel Base | 2300mm |
| H-Ground Clearance | 200mm |
| Platform Capacity | 360kg |
| Extension Capacity | 113kg |
| Max. Occupancy(in./out.) | 3/2 |
| Drive Speed (Stowed) | 4.8km/h |
| Drive Speed (Raised) | 0.6km/h |
| Turning Radius (In.) | 2.29m |
| Turning Radius (Out.) | 4.88m |
| Up/Down Time | 54/50s |
| Gradeability | 45% |
| Max. Slope | 2°/3° |
| Control | Proportional Control |
| Drive | Four-Wheel |
| Multi Disc Brake | Four-Wheel |
| Tire Size | 26x12-16 |
| Max. Wind Speed | 12.5m/s |
| Batteries (V/Ah) | 8x6V/370Ah |
| Charger | 100-240VAC/35A |
| Weight | 5600kg |

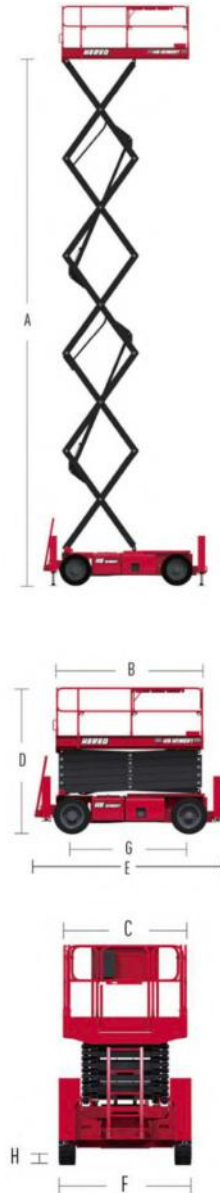




TRACCESS - HS1218ERT

40' ROUGH TERRAIN SCISSOR LIFT



TRACCESS - HS1623RT

53' ROUGH TERRAIN SCISSOR LIFT

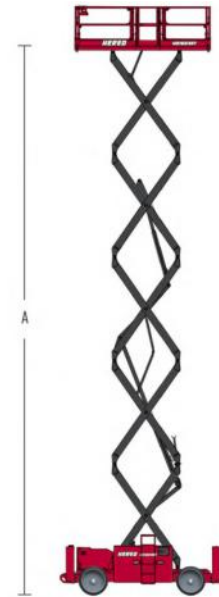

G I

| Models | HS1623RT |
|---|--------------|
| Max. Working Height | 17.95m |
| A-Max. Platform Height | 15.95m |
| Platform Dimension (B x C) | 3.81x1.83m |
| Front Platform Extension Length | 1.536m |
| Rear Platform Extension Length | 1.231m |
| D-Heights (Rails Up) | 3.21m |
| Heights (Rails Down) | 2.44m |
| E-Length (with Ladder) | 4.88m |
| Overall Width with Outriggers | 2.29m |
| G-Ground Clearance | 260mm |
| F-Wheel Base | 2862mm |
| Platform Capacity | 680kg |
| Extension Capacity | 230kg |
| Max. Occupancy(in./out.) | 4/4 |
| Drive height | 8.5m |
| Drive Speed (Stowed) | 6.1km/h |
| Drive Speed (Raised) | 1.1km/h |
| Up/Down Time | 55/65s |
| Turning Radius (Out.) | 3.9m |
| Tilt Rating(Front to Rear/Side to Side) | 3°/2° |
| Gradeability | 40% |
| Max Outrigger Leveling(Front to Rear) | 7° |
| Max Outrigger Leveling(Side to Side) | 12° |
| Max. Wind Speed | 12.5m/s |
| Tire Size | 832x290mm |
| Hydraulic Oil Tank Capacity | 120L |
| Fuel Tank Capacity | 120L |
| Engine | Kubota V2403 |
| Drive Type | 4WD |
| Weight | 7980kg |

TRACCESS



Contact: Geoff Davies
Phone: 0406 406 555
Email: geoff@traccess.com.au
Web: www.traccess.com.au