



# TRACCESS - AS2032E/H

20' ELECTRIC or HYDRAULIC SCISSOR LIFT

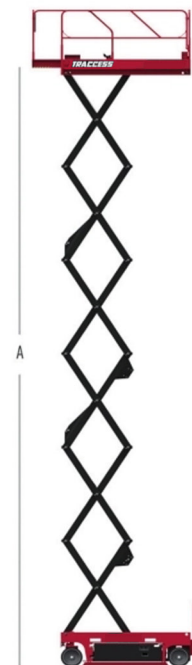

Models		AS2032E / H	
Measurements			
Max. Working Height		7.9m	
A-Max. Platform Height		5.9m	
B-Platform Length		2.26m	
C-Platform Width		0.81m	
Extension Size		0.9m	
D-Heights (Rails Up)		2.15m	
Height (Rails Down)		1.84m	
E-Length (with Ladder)		2.47m	
F-Overall Width		0.81m	
G-Wheelbase		1.85m	
H-Clearance (Stowed)		0.1m	
I-Clearance (Raised)		0.02m	
Performance			
Platform Capacity		380kg	
Extension Capacity		113kg	
Max. Occupancy (in./out.)		2/1	
Max. Drive Speed (Stowed)		3.5km/h	
Drive Speed (Raised)		0.8km/h	
Turning Radius (Out.)		2.1m	
Up/ Down Time		30/34s	
Gradeability		0.30	
Max. Slope		1.5°/3°	
Control		Proportional	
Drive		FWD	
Multi Disc Brake		Front	Rear
Max. Wind Speed		12.5m/s	
Tires (mm)		381X127mm	
Power			
Batteries (V/Ah)		24V/200Ah	
Charger		100-240VAC/10A	
Weight			
Weight		2050kg	1985kg